



ATi301-V

Visual Flame Detector

Designed for hazardous industries,
where fast optical flame detection
is critical and nuisance alarms are
not an option



ATi301-V Visual Flame Detector

Designed for hazardous industries where fast optical flame detection is critical and nuisance alarms are not an option.

The ATi301-V is an explosion proof visual flame detector. The device processes live video images to detect the characteristic properties of flames by means of its digital signal processing and hardcoded software algorithms.

Features and Benefits

Live Video

A live colour video image is available from each detector; this allows information about the protected area to be displayed on a monitor in the control room, providing the operator with a visual feedback of an event, which can reduce response time

False Alarm Immunity

The ATi301-V demonstrates superior false alarm immunity with live colour video direct from a specially designed optical detection device. It is the safest and most advanced flame detector on the market today, and its track record on the hundreds of installations where it is utilised has proven the instrument to be robust, even in the harshest of environments.



On-board microSD card


The ATi301-V incorporates a microSD card capable of recording a video of detected fires pre and post alarm. This recording is invaluable when carrying out an incident investigation and essentially by using the ATi301-V, there will never be an instance of an unknown alarm.

- Visual flame detection principle which ensures maximum false alarm immunity.
- Live colour video output.
- Single sensitivity for ease of mapping and maximum coverage.
- On-board microSD card - pre/post alarm video recording.
- Separate function test device – ATi Flame Simulator).
- Advanced optical verification test.
- Multiple Output Options for maximum flexibility and compatibility:
 - Alarm and Fault Relays
 - 0-20mA Current source or sink
 - HART Protocol
 - RS-485
- User Programmable via HART or RS-485.
- Can operate stand alone with or without video.
- Unrivalled MTBF – min 2,000,000 hours
- Certified SIL 2 Capable (Exida)
- Heated Window for operation in harsh weather conditions (snow, ice, condensation)
- Hazardous area zones:
 - Zones 1 & 2 with IIC gas group vapors present
- Ex approved to:
 - ATEX & IECEx
 - FM/FMC
- 3rd Party Performance Tested
 - FM 3260 Radiant Energy Sensing Fire Detectors for Automatic Fire Alarm Signalling
 - EN54-10 (VdS)

Field of View:

Horizontal FOV -90°

Vertical FOV -65°

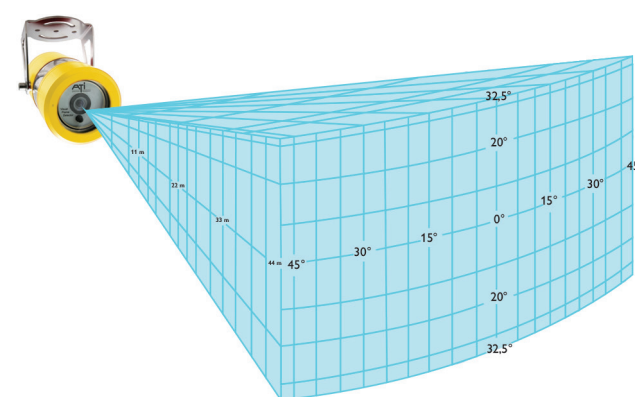

Flame Sensitivity

Fuel Fire	Size	Distance
Methane Jet Fire	0.9m (3ft) plume	30m (100 ft)
Ethanol	0.1m ² (1sqft) pan	25m (85 ft)
n-Heptane: Pan Fire	0.1m ² (1sqft) pan	44m (144 ft)
n-Heptane: in direct sunlight	0.1m ² (1sqft) pan	44m (144 ft)
n-Heptane: in modulated sunlight	0.1m ² (1sqft) pan	44m (144 ft)
n-Heptane: modulated black body	0.1m ² (1sqft) pan	44m (144 ft)
n-Heptane: Arc welding	0.1m ² (1sqft) pan	44m (144 ft)
n-Heptane: 1000watt lamp	0.1m ² (1sqft) pan	44m (144 ft)
Gasoline Fire	0.1m ² (1sqft) pan	44m (144 ft)
JP4	0.36m ² (3.8sqft)	61m (200 ft)
Ethylene Glycol	0.1m ² (1sqft) pan	15m (50 ft)
Diesel	0.1m ² (1sqft) pan	40m (130 ft)
Crude Oil (heavy fuel oil) Pan Fire	0.25m ² (2.7sqft)	40m (130 ft)
Silane	0.61m (2ft) plume	13m (42ft)

Technical specification

Environmental

Operating Temp: -60°C to +85°C (-76°F to +185°F)

Storage Temp: -60°C to +85°C (-76°F to +185°F)

Humidity: 0 to 95% RH non-condensing

Ingress: IP66, NEMA 4X

Operating Voltage

24Vdc Nominal – (18 to 32 Vdc Range)

Power Consumption

6 watts minimum (no heater), 10 watts typical

15 watts maximum (with heater)

Speed of Response

<7 seconds (Typical)

Enclosure

Dimensions: 100 Diameter x 200 Length Overall (mm)

Material: LM25 (Red epoxy), 316L stainless steel

Entries: 1 – M25 or ¾" NPT (Variants on Request)

Weight: 2.5kg (HE30) or 6kg (316L)

Outputs

Relay contacts - alarm and fault Current source/sink 4-20mA

RS485, HART (Consult Factory) Live colour video

– PAL and NTSC

Certification

ATEX : II 2 G Ex d IIC T4 (FM07ATEX0033)

Factory Mutual : 3260 Radiant Energy Sensing

Fire-Detectors for Automatic Fire Alarm Signalling (3029978)

IEC 61508 : SIL 2 (MP 080203 C001) IECEx FME 07.0002

Class 1 DIV 1 GROUPS B,C,D,T4

Class 1 Zone 1 AEx/Ex d IIC T4

ATi UK
Technology House
Gatehead Business Park
Delph New Road
Delph
Saddleworth
OL3 5DE

Tel: +44 (0)1457 873 318

Email: sales@atiuk.com

Web: www.atiuk.com

